

EBARA



Self Priming Trash Pump

Model EFQT, EFQU



water | wastewater | sewage | slurry



EBARA Pumps Americas Corporation

Model EFQT, EFQU

EBARA EFQ series pumps are available in a wide range of materials and sizes to handle solids and light slurries efficiently and effectively. The large volute allows for quick priming even with the casing only partially filled and an open suction line.

Features

- 3" solids handling (EFQT), 1.25" solids (EFQU)
- External shimless wear plate adjustment
- Easy removal cover plates and rotating element
- Cartridge Seals with Tungsten Carbide/Tungsten Carbide faces
- Skid Packages available:
 - Direct Drive
 - Piggy Back
 - Side-by-Side




Standard Specifications


| | EFQT | EFQU |
|------------------|-----------------|-------------------------|
| Design | Discharge | 2 to 12 inch |
| | Horsepower | 1 to 125 HP |
| | Capacity | 3400 GPM |
| | Total head | 130 feet |
| Speed | 650 to 2150 RPM | |
| Materials | Casing | Cast Iron A48 CL 30 |
| | Impeller | Ductile iron A 60-40-18 |
| | Wear Plate | Carbon Steel SAE 1020 |
| | Shaft | Alloy Steel 4140 |
| | Mechanical Seal | TC/TC, Viton, 316 SS |
| | Flap Valve | Reinforced Neoprene |

Alternate construction materials available on request including 304ss, 316ss and CD4 MCU

EFQT selection chart

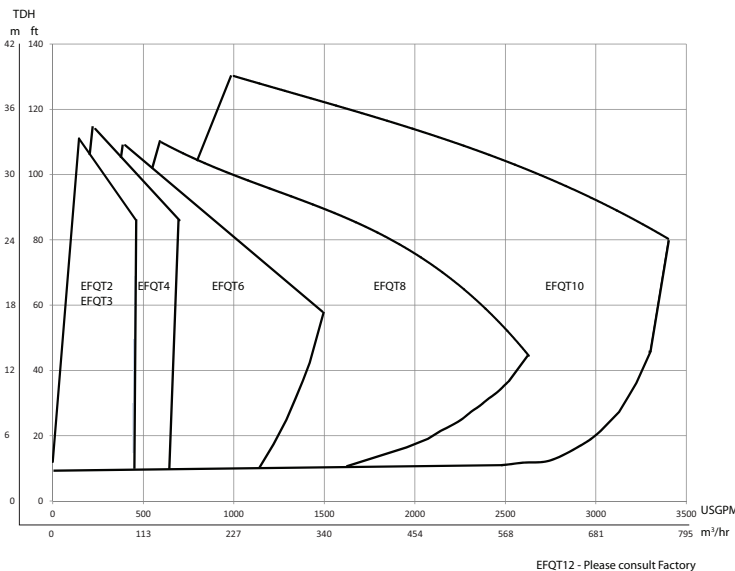

EFQU selection chart

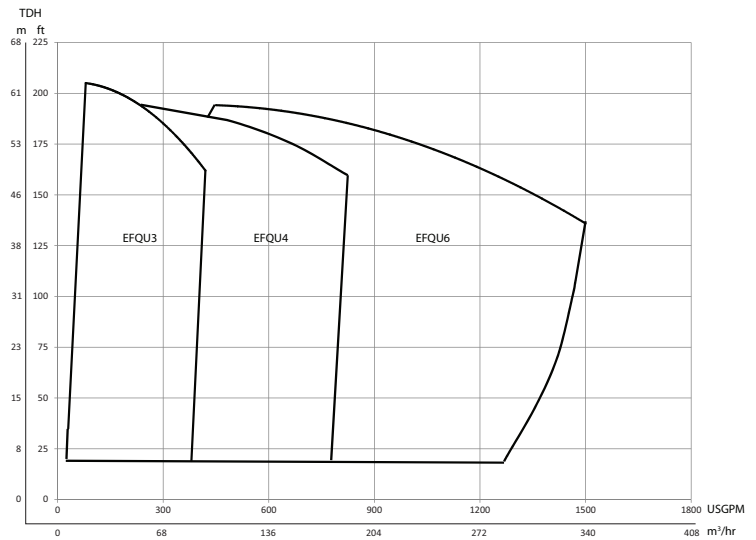

* All specifications subject to change without notice.



EBARA Pumps Americas Corporation
 1651 Cedar Line Drive • Rock Hill, SC 29730 • t (803) 327 - 5005 • f (803) 327 - 5097

www.pumpsebara.com

© 2018 EBARA Pumps Americas Corporation. All rights reserved.

EFHEFQ0415